

LIGHTBRIDGE MINI SERIES

Instruction Manual



MEADE[®]
INSTRUMENTS

Sun Warning



WARNING!

Never use a Meade® Telescope to look at the Sun! Looking at or near the Sun will cause instant and irreversible damage to your eye. Eye damage is often painless, so there is no warning to the observer that damage has occurred until it is too late. Do not point the telescope at or near the Sun. Children should always have adult supervision while observing.

Quick Start

In order to get started observing night sky objects, you will need to do the following:

1) Attach the red dot viewfinder



2) Insert the eyepiece



3) Align the red-dot viewfinder



4) Balance the telescope
(114mm & 130mm models only)



Table of Contents

Introduction	3
Specifications	4-6
About Your Telescope	7
Attaching The Accessories	8
Balancing The Scope	10
Aligning The Red Dot Viewfinder	12
Adjusting The Azimuth Tension	14
How To Use Your Telescope	15
Observing	16
Resources	20
Tip and Tricks	21
Calculating Magnification	23
Collimation	24
Viewfinder Battery Replacement	30
Care and Maintenance	31
Accessories	32
Recycling	33
Customer Service and Warranty	34



Introduction

Congrats on getting a LightBridge Mini Telescope! Now you can setup and share the stargazing experience in seconds. Whether you are camping in the outdoors or relaxing in your backyard, grab your Lightbridge Mini Dobsonian and take it wherever life takes you. Your telescope is already pre-assembled for you at our factory, so you only have to attach the accessories to start viewing galaxies, planets, stars and more!

Each telescope contains the following parts:

82mm



- Optical tube
- Dobsonian Mount
- Two Eyepieces
- Barlow lens
- Red dot finder
- Software dvd

114mm and 130mm



- Optical tube
- Dobsonian Mount
- Two Eyepieces
- Red dot finder
- Software dvd

LIGHTBRIDGE

M I N I 82


FIGURE 1A



Image A



Image B

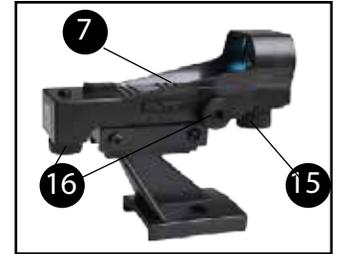

1. Mount Feet
2. Dobsonian Mount
3. Azimuth Tension Nut
4. Optical Tube Assembly (OTA)
5. Front Dust Cover (not shown)
6. Secondary Mirror Collimation Adjustments (not visible)
7. Red Dot Viewfinder (See Image B)
8. Red Dot Viewfinder Bracket Mounting Thumbscrews (See image A)
9. Focuser
10. Focuser Drawtube
11. Focuser Knob
12. Eyepiece
13. Eyepiece Holder Thumbscrews
14. Vertical Lock Knob (See Image A)
15. Red Dot Viewfinder Power Switch (See Image B)
16. Red Dot Viewfinder Adjustment Knobs (See Image B)

Accessories





Looking at or near the Sun will cause irreversible damage to your eye. Do not point this telescope at or near the Sun. Do not look through the telescope as it is moving.

LIGHTBRIDGE

M T N T 114 & 130

FIGURE 1B

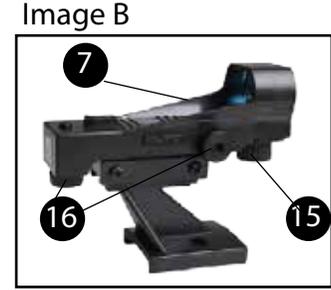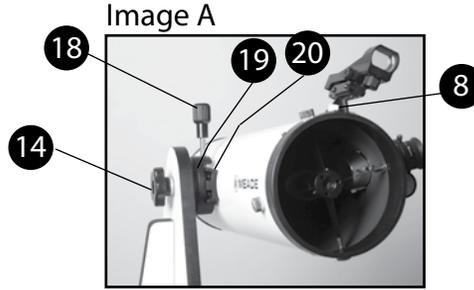

1. Mount Feet
2. Dobsonian Mount
3. Azimuth Tension Nut
4. Optical Tube Assembly (OTA)
5. Front Dust Cover (not shown)
6. Secondary Mirror Collimation Adjustments (not visible)
7. Red Dot Viewfinder (See Image B)
8. Red Dot Viewfinder Bracket Mounting Thumbscrews (See Image A)
9. Focuser
10. Focuser Drawtube
11. Focuser Knob
12. Eyepiece
13. Eyepiece Holder Thumbscrews
14. Vertical Lock Knob
15. Red Dot Viewfinder Power Switch (See Image B)
16. Red Dot Viewfinder Adjustment Knobs (See Image B)
17. Primary Mirror Collimation Adjustment Knobs (not visible)
18. Dovetail Locking Knob (See Image A)
19. OTA Dovetail (not visible)
20. Dovetail Receiver (not visible)

Accessories



5



Looking at or near the Sun will cause irreversible damage to your eye. Do not point this telescope at or near the Sun. Do not look through the telescope as it is moving.

Specifications


	82 mm	114mm	130mm
Optical tube design	Reflector	Reflector	Reflector
Optical tube focal length	300mm	450mm	650mm
Primary mirror diameter	82mm (3.2 in.)	114mm (4.5 in.)	130mm (5.1 in.)
Focal ratio	f/3.7	f/4	f/5
Viewfinder	Red dot	Red dot	Red dot
Eyepieces	Two(2) 1.25" H26mm, H9mm	Two(2) 1.25" MA 26mm, MA 9mm	Two(2) 1.25" MA 26mm, MA 9mm
2X Barlow	Included	Optional Accessory	Optional Accessory

About The Telescope

The LightBridge Mini Series are Dobsonian tabletop telescopes. The word "Dobsonian" comes from its inventor John Dobson, who created this specialized mount. This mount style allows you to move the telescope both up/down (vertical) and left/right (horizontal). Because its height is fixed, use the telescope on a tabletop or stable elevated surface for comfortable viewing. Sturdy tabletop surfaces permit you to enjoy the 360° swivel mount while the "point-and-look" design allow you to aim the scope at whatever celestial object you choose.

These optical tubes, called reflectors, use mirrors to focus incoming light. Inside the telescope, there are two mirrors: a primary and a secondary mirror. The primary mirror is the largest of the two and is located at the bottom of the tube. The secondary mirror is near the top of the tube.

The large primary mirror collects light from the object you're looking at and bounces it forward to the secondary mirror which redirects it out the side of the tube.

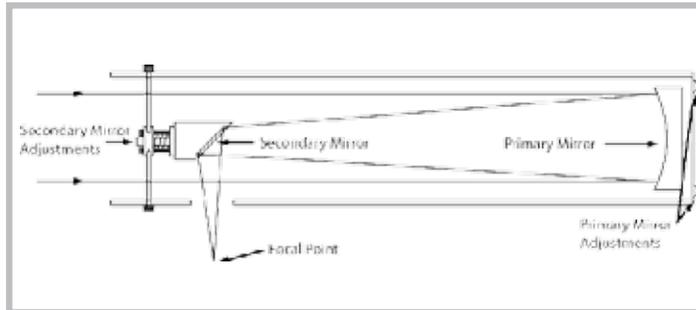

Looking at or near the Sun will cause irreversible damage to your eye. Do not point this telescope at or near the Sun. Do not look through the telescope as it is moving.

Attaching your Accessories

Red Dot Finder

An eyepiece (fig.1, #12) has a narrow field of view. A red dot viewfinder (fig.1, #7) has a wider field of view, which makes it easier to locate objects. Once the red dot viewfinder is aligned to the optical tube, the red dot can be used to locate and place objects more easily in the telescope's eyepiece.

STEP 1: Remove the two thumbscrews (fig.1, #8) from the optical tube.

STEP 2: Take the red dot viewfinder and place the bracket onto the threaded screws, with the viewfinder lens forward towards the front of the telescope.

STEP 3: Use the two thumbscrews to secure the red dot viewfinder bracket to the optical tube. Tighten to a firm feel.



Attaching your Accessories

Inserting An Eyepiece

Magnification, or power is based on eyepiece focal length. The higher power will present a larger, dimmer image, with smaller field of view. The lower the power, the brighter and smaller the image will be, with a wider field of view.

STEP 1: Slide desired eyepiece directly onto the focuser draw tube (fig.1 #10).

STEP 2: Tighten the eyepiece holder thumbscrews (fig.1 #13) to hold the eyepiece securely.



Expert's Tip

When locating objects it is always best to start with the lower power (26mm) eyepiece. The 26mm has a wide viewing field that will allow objects to be more easily found. Once located and centered, you can switch to a higher power eyepiece such as a 9mm to increase the viewing power. The higher power will present a larger, dimmer image, with smaller field of view.

Balancing the Scope

114mm and 130mm models ONLY

Balancing

Sometimes when using heavy eyepieces or accessories, the optical tube can become out of balance. It is important to balance the optical tube so when you release the vertical lock (fig.1, 14), the telescope will not swing quickly or move uncontrollably. A balanced telescope also allows for smooth motion when using the telescope.

STEP 1: Test the balance of the scope.

While supporting the optical tube with one hand, loosen the vertical lock knob on the side of the mount. The optical tube will turn freely about this axis. If the optical tube tends to move or drift when your supporting hand is moved, it is necessary to balance the optical tube.



Step 2.

STEP 2: Determine the imbalance; either top-heavy or bottom-heavy.

Top-heavy: If the front of the telescope tube wants to rotate downward, the optical tube is too heavy in the front and needs to be adjusted toward the back.

Bottom heavy: If the back of the telescope wants to rotate downward, the optical tube is too heavy in the back and should be adjusted forward.



Top heavy

Bottom heavy

Balancing the Scope

114mm and 130mm models ONLY

STEP 3: Adjust until balance is achieved.

Loosen the dovetail locking knob (fig. 1b,#18) slightly and slide the optical tube (fig. 1b, #4) along the dovetail receiver (fig. 1b, 20) until the telescope remains in any given position without tending to drift up or down in the vertical axis.

NOTE: Do not over-loosen the dovetail locking knob or the optical tube could come completely off of the mount.

STEP 4: Tighten when balanced.

Relock the dovetail locking knob until firm.

Step 3.



Step 4.



Aligning the Red Dot Viewfinder

Aligning the red dot viewfinder allows you to accurately point at the same location as the telescope. It is recommended that you perform steps 1 and 2 during the day and step 3 during nighttime.

STEP 1: Point telescope at an easy-to-find target.

NOTE: DO NOT EVER POINT AT OR NEAR SUN!

STEP 2: Look through the 26mm eyepiece and turn the focuser knob (fig 1.#11) until the image is sharply focused. Center the object precisely in the eyepiece's field of view.

STEP 3: Turn on the red dot viewfinder by turning the on/off switch (fig 1.#15) clockwise.




Aligning the Red Dot Viewfinder

STEP 4: Look through the red dot viewfinder. Turn one or both of the viewfinder's alignment screws (fig 1.#16) until the red dot is precisely over the same object as you centered in the eyepiece. The side alignment screw controls the horizontal, while the rear alignment screw controls the vertical.

STEP 5: When finished, turn off the red dot viewfinder by rotating the on/off switch (fig 1.#15) counter-clockwise.

STEP 6: Check this alignment at night on a celestial object, such as the Moon or a bright star, and use the viewfinder's alignment screws to make any necessary refinements. Once they are aligned and pointing at the same location, use the red dot viewfinder to locate objects by placing the red dot over the object. Then use the 26mm eyepiece to view the object.

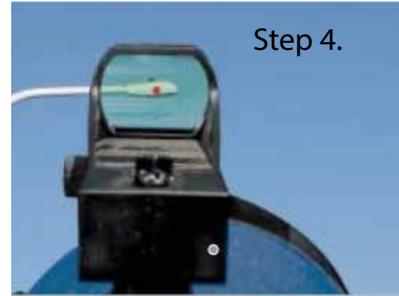


Adjusting the Azimuth Tension

The LightBridge Series Telescopes can move in both the horizontal and vertical motions. The tightness of the vertical motion is controlled by adjusting the vertical lock knob (fig.1,#14).

The tension for the horizontal motion is adjusted at the Meade factory. If the adjustment is not to your liking, it is easy to adjust by tightening/loosening one screw (fig. 1,#3).

Two wrenches are needed to make the adjustment. One wrench is needed to hold the screw head located at the bottom side of the mount base.

The other wrench is placed on the Azimuth Tension Nut (fig.1,3) and adjusted as desired.

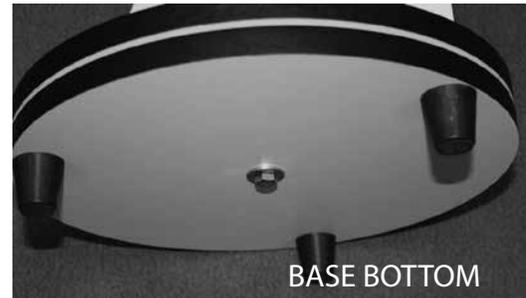

How to use your Telescope

Step 1

Pick an object in the sky that you want to view, and make sure you are using the 26mm eyepiece.

Step 2

Turn the red dot finder on. Adjust the vertical lock knob as needed and take aim at the object using your red dot viewfinder.

Step 3

When the red dot is placed over the object, tighten the vertical lock knob to secure the optical tube in place.

Step 4

Look through the eyepiece to see if the object is in view and center it, if necessary.

Step 5


Gently adjust the focus in or out until you have a crisp, clean image.

Step 6

Try out the different eyepieces to get a closer look at the object.



Looking at or near the Sun will cause irreversible damage to your eye. Do not point this telescope at or near the Sun. Do not look

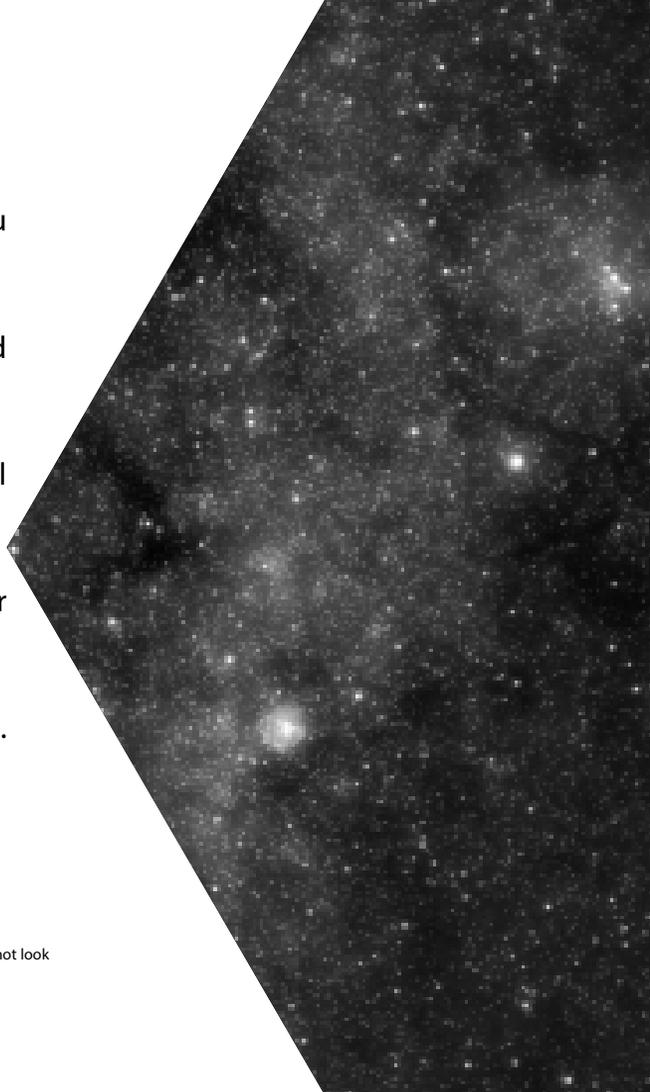

Observing

We have one very important rule that you should always follow when using your telescope:
Have Fun!

Have a good time when you're observing. You may not know everything that there is to know about a telescope or what all the sights in the universe are, but that's OK. Just point and observe at first. You will enjoy your telescope the you practice and learn more about it. Galileo, who is one of the first astronomers to use a telescope, discovered four of the moons of Jupiter with a telescope about the same size as yours- and his didn't even focus very well!

Don't be scared off by difficult terms or complicated procedures. Don't panic! Just relax and enjoy your scope. Utilize the internet and books to learn about constellations, stars, planets and the hobby overall.



Don't
stress,
Have fun!



Observing the Moon

The Moon is the best object to observe the first time you go out at night. Pick a night when the Moon is a crescent. No shadows are seen during a full Moon, making it appear flat and uninteresting. Look for different features on the Moon.

The most obvious features are craters. In fact you can see craters within craters. Some craters have bright lines about them. These are called rays and are the result of material thrown out of the crater when it was struck by a colliding object. The dark areas on the Moon are called maria and are composed of lava from the period when the Moon still had volcanic activity. You can also see mountain ranges and fault lines on the Moon.



Looking at or near the Sun will cause irreversible damage to your eye. Do not point this telescope at or near the Sun. Do not look through the telescope as it is moving.

Observing the Solar System

Venus is seen before dawn or after sunset, because it is close to the Sun. You can observe Venus going through crescent phases. But you cannot see any surface detail on Venus because it has a very thick atmosphere of gas. When Mars is close to the Earth, you can see some details on Mars, and sometimes even Mars' polar caps. Jupiter is quite interesting to observe. You can see bands across the face of Jupiter.

The more time you spend observing these bands, the more details you will be able to see. One of the most fascinating sights of Jupiter are its moons. The four largest moons are called the Galilean moons, after the astronomer Galileo, who observed them for the first time. If you've never watched the Galilean moons in your telescope before, you're missing a real treat!

Each night, the moons appear in different positions around the Jovian sky. This is sometimes called the Galilean dance. On any given night, you might be able to see the shadow of a moon on the face of Jupiter, see one moon eclipse another or even see a moon emerge from behind Jupiter's giant disk. Probably the most memorable sight you will see in your telescope is Saturn. Although you may not see many features on the surface of Saturn, its ring structure will steal your breath away. On nights of very steady seeing you may be able to see a black opening in the rings, known as the Cassini band.




Observing the Beyond

Once you have observed our own system of planets, it's time to really travel far from home and look at stars and other objects. You can observe thousands of stars with your telescope. At first, you may think stars are just pinpoints of light and aren't very interesting. But look again. There is much information that is revealed in stars. The first thing you will notice is that not all stars are the same colors. See if you can find blue, orange, yellow, white and red stars. The color of stars sometimes can tell you about the age of a star and the temperature that they burn at.

You may be able to see the Andromeda galaxy and several others in your telescope. They will appear as small, fuzzy clouds. Only a very large telescope will reveal spiral or elliptical details.

You will also be able to see some nebulas with your scope. Nebula means cloud. Most nebulas are clouds of gas. The two easiest to see in the Northern Hemisphere are the Orion nebula during the winter and the Triffid nebula during the summer. These are large clouds of gas in which new stars are being born. Some nebulas are the remains of stars exploding. These explosions are called supernovas.

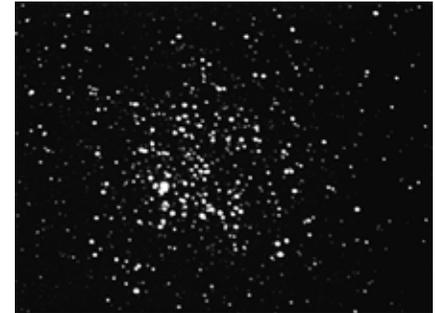


Looking at or near the Sun will cause irreversable damage to your eye. Do not point this telescope at or near the Sun. Do not look through the telescope as it is moving.

Resources

STAR CHARTS

Star charts and planispheres are useful for a variety of reasons. They are a great aid in planning a night of celestial viewing. A wide variety of star charts are available in books, in magazines, on the internet, apps and CD Roms. Meade offers AutoStar Suite™ software (contact your local dealer or visit Meade.com).



Astronomy and Sky and Telescope magazines print star charts each month for up-to-the-minute maps of the heavens. Apps like SkyWeek or Star Chart are great for on-the-go information.

MAGAZINES



WEB LINKS

- The Meade 4M Community:
<http://www.meade4m.com>
- Sky & Telescope:
<http://www.skyandtelescope.com>
- Astronomy:
<http://www.astronomy.com>
- Astronomy Picture of the Day:
<http://antwrp.gsfc.nasa.gov/apod>
- Photographic Atlas of the Moon:
http://www.lpi.ursa.edu/research/lunar_orbiter
- Hubble Space Telescope Public Pictures:
<http://opposite.stsci.edu/pubinfo/pictures.html>

APPS



Sky Week



Star Chart

Tips and Tricks

Let your eyes “dark-adapt”: Allow five or ten minutes for your eyes to become “dark adapted” before observing. Use a red filtered flashlight to protect your night vision when reading star maps, or inspecting the telescope. Stay away from bright lights too. Do not use a regular flash-light or turn on other lights when observing with a group of other astronomers.



EYEPIECES

Always begin your observations using the 26mm low-power eyepiece. The 26mm eyepiece delivers a bright, wide field of view and is the best to use for most viewing conditions. Use the high-power 9mm eyepiece to view details when observing the Moon and planets. If the image becomes fuzzy, switch back down to a lower power. Changing eyepieces changes the power or magnification of your telescope. Optional Accessory Barlow lens: You can also change magnification by using a Barlow lens. The Barlow lens doubles the power of your telescope.



OBJECTS MOVE IN THE EYEPIECE

If you are observing an astronomical object, you will notice that the object will begin to move slowly through the telescopic field of view. This movement is caused by the rotation of the Earth and makes an object move through the telescope’s field of view. To keep astronomical objects centered in the field, simply move the telescope on one or both of its axes—vertically and/or horizontally as needed. At higher powers, astronomical objects will seem to move through the field of view of the eyepiece more rapidly.

Tips and Tricks

THINGS THAT AFFECT VIEWING



VIBRATIONS: Avoid touching the eyepiece while observing through the telescope. Vibrations resulting from such contact will cause the image to move. Avoid observing sites where vibrations cause image movement.



LIGHT POLLUTION: Light pollution is excessive, misdirected, or artificial outdoor light. Too much light pollution has consequences: it washes out starlight in the night sky, interferes with astronomical research, disrupts ecosystems, has adverse health effects and wastes energy.



OBSERVING CONDITIONS: Planets and other objects viewed low on the horizon often lack sharpness—the same object, when observed higher in the sky, will appear sharper and have greater contrast. Be aware of your climate and surroundings at your observing location. Viewing conditions such as humidity and atmospheric turbulence can negatively impact your observations.



VIEWING THROUGH WINDOWS: Avoid setting up the telescope inside a room and observing through an opened or closed window pane. Images may appear blurred or distorted due to temperature differences between inside and outside air. Also, it is a good idea to allow your telescope to reach the ambient (surrounding) outside temperature before starting an observing session.

Calculating Magnification

The power of a telescope is how much it magnifies objects. Each telescope has its own set of focal lengths and, therefore, different magnifications when used with various eyepieces. For example, the LightBridge Mini 130mm used with the 26mm eyepiece magnifies an object 25 times. The 9mm eyepiece used with the LightBridge Mini 130mm will magnify objects 72 times. You can calculate how much magnification an eyepiece will have with your specific telescope. Just divide the telescope focal length by the focal length of the eyepiece.

$$\begin{array}{l} \text{Focal Length of the Telescope} \\ \div \\ \text{Focal Length of the Eyepiece} \\ = \text{Magnification} \end{array}$$

Look at the specifications. For example, you will see that the focal length of the LightBridge Mini 130mm is 650mm. Let's say that you have obtained a 6.3mm eyepiece. You can tell what the focal length of your eyepiece is as it is always printed on the side of the eyepiece. Divide: 650mm \div 6.3mm, which equals 103.17. Round this off to the nearest whole number and you find the 6.3mm eyepiece used with the LightBridge Mini 130mm magnifies objects 103 times.

$$\text{Eyepiece's magnification} \times 2$$

$$= \text{Magnification with a 2X Barlow lens}$$

If you use a Barlow lens with one of your eyepieces, it doubles the magnification of your eyepiece. Other types of Barlows can triple or further increase the power of an eyepiece. To find out how much your magnification is when you use a 2x Barlow, multiply your eyepiece's magnification by two. For example, the 9mm low-power eyepiece used with the LightBridge Mini 130mm magnifies an object 72 times. Multiply 72 by 2 and you get 144 times magnification with a Barlow.

Expert's Tip

It's worth repeating: Keep in mind that a bright, clear, but smaller image is more interesting than a larger, dimmer, fuzzy one. Using too high a power eyepiece is one of the most common mistakes made by new astronomers. So don't think that higher magnification is necessarily better—quite often the best view is with a lower magnification value!

Collimation


What is collimation?

All Meade LightBridge Mini Reflecting telescopes are optically aligned at the factory prior to shipment. It is unlikely that you will need to align, or collimate, the optics after receipt of the instrument. However, if the telescope received unusually rough handling in shipment, it is possible that the optics must be re-aligned for best optical performance.

Figure 3 shows the Primary Mirror Cell (114 & 130 models only), the three primary mirror tilt screws (fig. 3, #2), and the primary mirror cell locking knobs (fig. 3, #3). The primary mirror tilt screws adjust the tilt-angle of the mirror, and the primary mirror cell locking knobs locks the mirror in place.


Figure 4 shows the Secondary Mirror Assembly and the three secondary mirror collimation screws (fig. 4, #2). These screws allows for adjustments of the secondary mirror assembly.

Figure 3

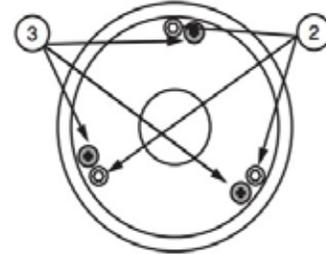

Primary Mirror Cell Models 114 & 130 only

Figure 4

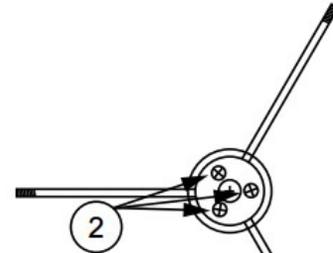

Secondary Mirror Assembly




Collimation

CORRECT COLLIMATION:

The properly collimated (aligned) mirror system in the Meade LightBridge Mini telescope assures the sharpest images possible. This occurs when the primary mirror and secondary mirror are tilted so that the focused image falls directly through the center of the focuser draw tube. To inspect the view of the mirror collimation, look down the focuser draw tube with the eyepiece removed.

The edge of the focuser drawtube (fig. 5, #1), will frame the reflections of the primary mirror with the 3 mirror clips (fig. 5, #2), the secondary mirror (fig. 5, #3), the spider vanes (fig. 5, #4), and your eye (fig. 5, #5). Properly aligned, all of these reflections will appear concentric (i.e., centered) as illustrated in Figure 5. Any deviation from the concentric reflections will require adjustments to the secondary mirror assembly (fig. 4) and/or the primary mirror cell (fig. 3).

Figure 5

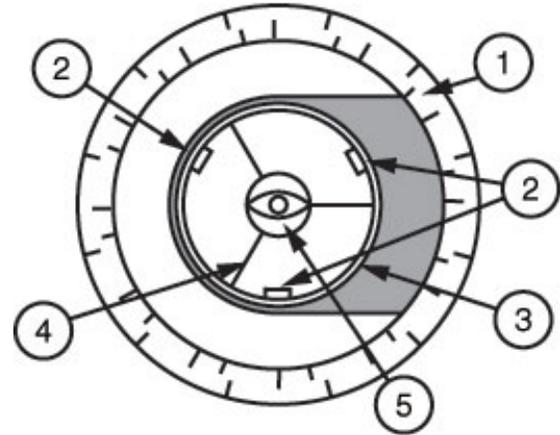


Looking at or near the Sun will cause irreversible damage to your eye. Do not point this telescope at or near the Sun. Do not look through the telescope as it is moving.

Collimation

SECONDARY MIRROR HOLDER ADJUSTMENTS:

If the secondary mirror (fig. 6, #1) is centered in the draw tube (fig. 6, #2), but the primary mirror is only partially visible in the reflection (fig. 6, #3), one or more of the 3 secondary mirror collimation screws need adjusting. First, unthread each of the secondary mirror collimation screws slightly to the point of where you can tilt the secondary holder from side-to-side.

By grasping the secondary holder with your hand, tilt the secondary mirror holder until you see the primary mirror become as centered in the reflection of the diagonal mirror as possible. Once you are at the best position, thread in the 3 secondary mirror collimation screws to lock the holder in place. Then, if necessary, make adjustments to these 3 screws to refine the tilt-angle of the secondary mirror until the entire primary mirror can be seen centered within the secondary mirror reflection. When the secondary mirror is correctly aligned, it will look like Figure 7.

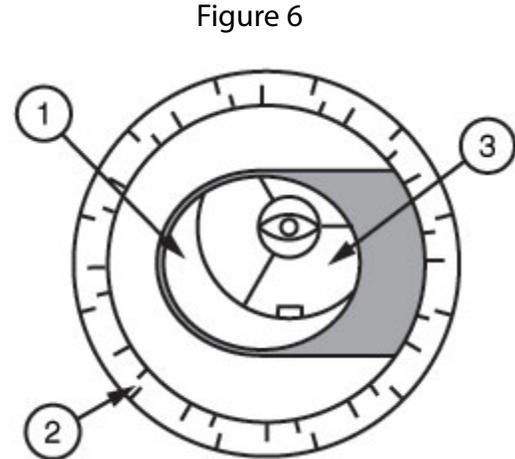

Note: The primary mirror is shown out of alignment.



Collimation


PRIMARY MIRROR ADJUSTMENTS

(114mm & 130mm Models Only):

If the secondary mirror (fig. 7, #1) and the reflection of the primary mirror (fig. 7, #2) appear centered within the draw tube (fig. 7, #3), but the reflection of your eye and the reflection of the secondary mirror (fig. 7, #4) appear off center, you will need to adjust the primary mirror tilt screws (fig. 3, #2) of the primary mirror cell. These primary tilt screws are located behind the primary mirror, at the lower end of the main tube.

To adjust the primary mirror tilt screws (fig. 3, #2), first turn by several turns, the primary mirror cell lock knobs (fig. 3, #3) that are next to each primary mirror tilt screw. The three primary mirror cell locking screws are slotted head screws on the LightBridge 114/130 Mini models. Then by trial-and-error, turn the primary mirror tilt knobs (fig. 3, #2) until you develop a feel for which way to turn each knob to center the reflection of your eye. Once centered, as in Figure 5, turn the 3 primary mirror cell locking screws (fig.3,#3) to re-lock the tilt-angle adjustment.

Figure 7

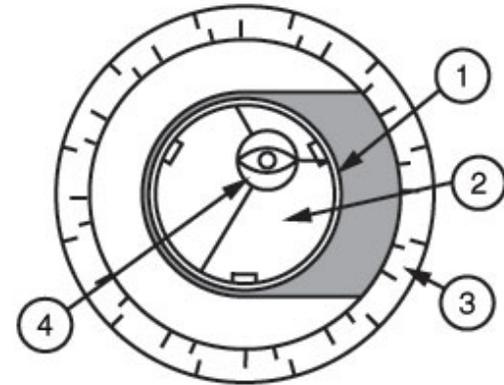

NOTE: The LightBridge 82mm telescope does not have primary mirror collimation screws and is permanently mounted at the factory.



Looking at or near the Sun will cause irreversable damage to your eye. Do not point this telescope at or near the Sun. Do not look through the telescope as it is moving.

Collimation

With the collimation performed, you will want to test the accuracy of the alignment on a star. Use the 26mm eyepiece and point the telescope at a moderately bright (second or third magnitude) star, then center the star image in the telescope's field-of-view. With the star centered follow the method below:

- Bring the star image slowly out of focus until one or more rings are visible around the central disc. If the collimation was performed correctly, the central star disk and rings will be concentric circles, with a dark spot dead center within the out-of-focus star disk (this is the shadow of the secondary mirror), as shown in Figure 10. (An improperly aligned telescope will reveal elongated circles (fig. 8), with an off-center dark shadow.)

- If the out-of-focus star disk appears elongated (fig. 8), you will need to adjust the primary mirror adjusting tilt screws of the primary mirror cell (fig. 3, #3)

- To adjust the primary mirror tilt screws, first unscrew several turns the 3 slotted-head primary mirror cell locking screws (fig. 3, #2), to allow free turning movement of the tilt knobs.

Figure 8




Figure 9



Collimation


- Move the telescope until the star image is at the edge of the field-of-view in the eyepiece, as in Figure 9.

- As you make adjustments to the primary mirror tilt screws (fig. 3, #3), you will notice that the out-of-focus star disk image will move across the eyepiece field. Choose one of the 3 primary mirror tilt screws and slightly move the shadow to the center of the disk. Then slightly move the telescope to center the star disk image in the center of the eyepiece.

- If any further adjustments are necessary, repeat this process as many times as needed until the out-of-focus star disk appears as in Figure 10, when the star disk image is in the center of the eyepiece field.

- With the star testing of the collimation complete, tighten the 3 slotted-head primary mirror locking screws (fig. 3, #2)

Figure 10

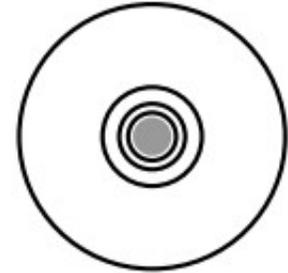

Meade also sells a Laser Collimator accessory that will simplify collimation of the optics. This device works by shining a red laser onto the optics and viewing the reflected light. If the reflected light beam is not centered on the device, it can be easily adjusted using the telescope adjustments until the beam is centered.

Viewfinder Battery

If the viewfinder red dot does not illuminate, verify the viewfinder is on by rotating the power switch (fig 1, #15) below the viewfinder lens clockwise.

If the red dot does not illuminate, the battery may need replacing. To replace the battery, press the left side of the viewfinder housing labeled “push”. The battery compartment will slide out on the right side of the viewfinder (see Figure 11).

Replace the battery with a Lithium CR2032 battery with the positive side up. Then push the battery compartment back into the viewfinder and power on.

Figure 11



Care and Maintenance

Your telescope is a precision optical instrument designed for a lifetime of rewarding viewing. It will rarely, if ever, require factory servicing or maintenance. Follow these guidelines to keep your telescope in the best condition:

As with any quality instrument, lens or mirror surfaces should be cleaned as infrequently as possible. Telescope optics should be cleaned only when absolutely necessary. In all cases avoid touching any mirror surface. A little dust on the surface of a mirror or lens causes negligible loss of performance and should not be considered reason to clean the surface. When lens or mirror cleaning does become necessary, use a camel's hair brush or compressed air gently to remove dust. If the telescope's dust cover is replaced after each observing session, cleaning of the optics will rarely be required.

Fingerprints and organic materials on the lens or mirror may be removed with a solution of 3 parts distilled water to 1 part isopropyl alcohol. You may also add 1 drop of biodegradable dishwashing soap per pint of solution. Use soft, white facial tissues and make short, gentle strokes. Change tissues often.



CAUTION: Do not use scented or lotioned tissues or damage could result to the optics.
DO NOT use a commercial photographic lens cleaner.

Accessories

For an up-to-date list of compatible Meade accessories, contact your Meade Dealer or see the Meade online catalog for more information. Visit us on the web at www.meade.com.

ADDITIONAL EYEPIECES: (1.25" barrel diameter only): For higher or lower viewing magnifications, Meade's eyepieces are available in a wide variety of focal lengths and provide a high level of image resolution and color correction at economical prices. Available as individual eyepieces or in sets with carry case!

COLOR/MOON FILTERS: Meade Color filters permit observation of planetary/lunar surface detail that is often virtually invisible without filtration. Choose the filter or filter set that best meet your needs and see what you have been missing!

BARLOW LENS: The Meade 2x or 3x Barlow doubles or triples the magnification of your 1.25" eyepieces. The 2x is our most popular Barlow due to its excellent quality, value, and usefulness on nearly every model telescope sold.

LASER COLLIMATOR: Easily and quickly align your telescope optics! May be used on any standard Newtonian reflector telescope where the optical system contains two independently adjustable mirrors. Features adjustable brightness. Powered from a single CR2032 type battery (included).

Eyepiece
Kit & filters



Barlow Lens

Laser Collimator



Customer Service and Warranty

MEADE CUSTOMER SERVICE:

Have a question concerning your telescope? Call Meade Instruments Customer Service Department! We're happy to help.

Before returning the telescope to the factory, call the Meade Customer Service Department first as most problems can be solved over the phone. Make sure to give a full description of the problem, as well as your name, address, and daytime telephone number. The great majority of servicing issues can be resolved by telephone, avoiding return of the telescope to the factory.

MEADE LIMITED TIME WARRANTY:

Every Meade telescope, and telescope accessory is warranted by Meade Instruments Corp. ("Meade") to be free of defects in materials and workmanship for a period of ONE YEAR from the date of original purchase in the U.S.A. Meade will repair or replace a product, or part thereof, found by Meade to be defective, provided the defective part is returned to Meade, freight-prepaid, with proof of purchase. This warranty applies to the original purchaser only and is nontransferable. Meade products purchased outside North America are not included in this warranty, but are covered under separate warranties issued by Meade international distributors.

CONTACT US

By Phone:
800-626-3233
M-F; 7AM-4PM PST

Via email:
customerservice@meade.com

Customer Service and Warranty

RG NUMBER REQUIRED:

Prior to the return of any product or part, a Return Goods Authorization (RGA) number must be obtained from Meade by writing, or by calling (800) 626-3233.

Each returned part or product must include a written statement detailing the nature of the claimed defect, as well as the owner's name, address, and phone number.

This warranty is not valid in cases where the product has been abused or mishandled, where unauthorized repairs have been attempted or performed, or where depreciation of the product is due to normal wear-and-tear.

Meade specifically disclaims special, indirect, or consequential damages or lost profit which may result from a breach of this warranty. Any implied warranties which cannot be disclaimed are hereby limited to a term of one year from the date of original retail purchase. This warranty gives you specific rights. You may have other rights which vary from state to state.


Meade reserves the right to change product specifications or to

Recycling

CORRECT DISPOSAL OF THIS PRODUCT (Waste Electrical & Electronic Equipment)

This marking shown on the product or its literature indicates that it must not be disposed of in unsorted municipal waste at the end of its working life.

To prevent possible harm to the environment or human health from uncontrolled waste disposal, please separate this from other types of wastes and recycle it as required by law. Household users should contact either the retailer where they purchased this product, or their local government office, for details of where and how they can take this item for environmentally safe recycling. Business users should contact their supplier and check the terms and conditions of the purchase contract. This product should not be mixed with other commercial wastes for disposal.



We appreciate your business. Keep in touch!

Let's Get Social:



@MeadeInstruments



@MeadeInstruments



@MeadeInstrument

Share your photos with us:

#MeadePhotos

Social@meade.com

For special offers and other products, visit our website:

www.meade.com



MEADE[®]
INSTRUMENTS

1-800-626-3233
Meade Instruments
27 Hubble
Irvine, CA 92618